



Solar Post Lamp

21010


Instruction Manual

Features

- Solar powered by high quality crystalline solar panel
- Supper Bright LED's
- Water proof design provides longer life in all weather conditions
- Automatically turns the light on at dusk
- OFF/P/ON switch, strong/weak brightness optional mode
- 6 Ft. High
- Aluminum construction

Location of the Solar Panel


For best result, position the solar panel where it can get direct sunlight, and is free from cover and shade. (As shown in figure 1). The Solar Post Lamp should be left to charge for 2 sunny days before initial use

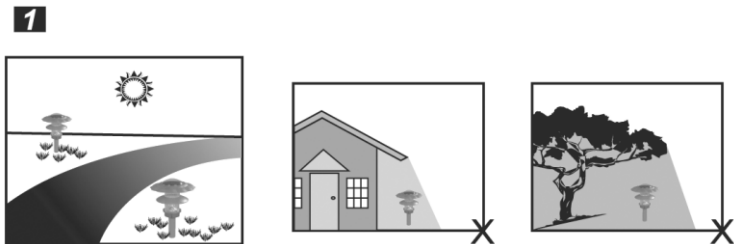

Mount Instructions



Post Lamp Base Instructions (see Figure 2 and Figure 3))

1. Carefully remove all the fittings from the box. (Figure 3)
2. Choose a location to place your Solar Post Lamp. Make sure the location is flat otherwise the lamp will not be straight.
3. Mark the place with the holes on the Lamp Base (5, Figure 3). Then Drill holes in the location over the marked place.
4. Place the Anchor (Figure 2) in the holes, add the nut and twist until tightened
5. Release the Nut from the Anchor and put the Lamp Ground Base (5) or the Lamp Wall Bracket onto the Anchor, the Anchor should be through the holes.
6. Now add the Pad and Spring Pad onto the Anchor (see figure 2), then tighten with the Nut. Make sure Lamp Ground Base (5) or the Lamp Wall Bracket is secure and stable.

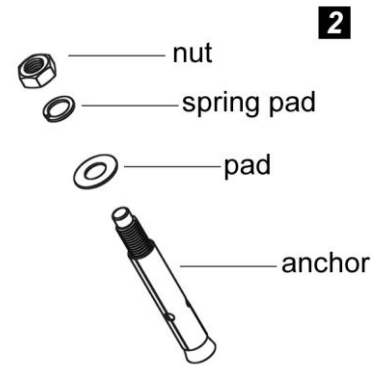


Lamp Ground mounting (see figure 3)

1. Install the Lamp Pole (4) onto the Lamp Ground Base (5) with the 3 screws supplied and L shape wrench.
2. Install Lamp pole (3 & 2) by twisting clockwise.
3. Make sure all the lamp poles are secure and tight, and then twist the Lamp Head (1) onto Lamp Pole (2) by twisting clockwise.

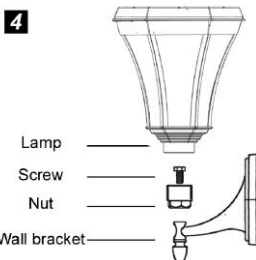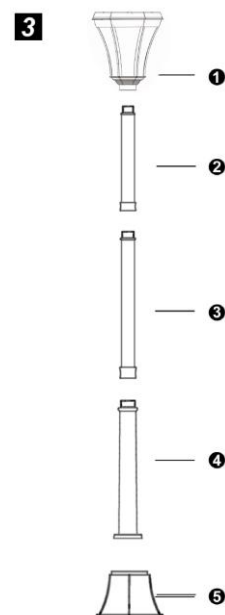

Lamp Wall mounting (optional) (see figure 4)

- 1) After installing the Wall Bracket, fixing the Nut onto the Wall Bracket with the supplied Screws.
- 2) Twisting the Lamp Head onto the nut and twist clockwise.

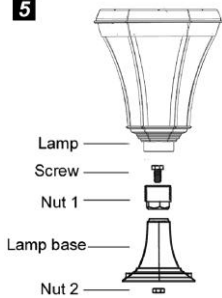5

Lamp Wall-Top mounting (optional) (see figure 5)

- 1) Place Nut 1 onto the Lamp Base with supplied Screw and Nut 2;
- 2) Install the Lamp Base on the wall top.
- 3) Install the Lamp Head onto Nut 1 by twisting clockwise.

Operation


- 1) For normal operation, push the switch to the "P" position or "ON" position to get "strong" or "weak" brightness (see figure 6), it will automatically turn on at dusk.
- 2) The performance of the Solar Step Lights will vary during the time of year. The light will deliver more intensity when it has had a full day of sun rather than a day in cloudy or overcast weather.

6

Replacing the Batteries

For best results battery should be replaced every 12 months.

- 1) Release the screws under the lamp head (as shown in figure 4).
- 2) Take off lamp head.
- 3) Release screws which attach the top of the lamp head bracket
- 4) Pull off the wired connector from the battery and take out the old batteries.
- 5) Replace with the new batteries and connect the wired connector onto the battery with the correct polarity. Be sure the red wire is connected to red polarity (+) and black wire is connected to black polarity (-).
- 6) Reassemble the unit by reversing the above procedure

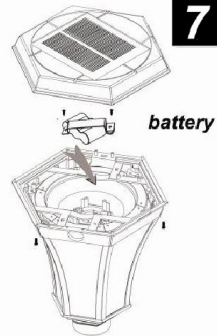7

Trouble Shooting

If your Solar Post Lamp does not come on at dusk despite observance of all the instructions, please try the following steps:

- 1) Make sure the Solar Post Lamp is not being affected by any other light source, if this is the case move your Solar Post Lamp to a location where there is less light interference.
- 2) Make sure the Solar Post Lamp's solar panel is not located in the shade during the day.
- 3) Make sure the switch is in the AUTO position.
- 4) Check that battery is installed correctly.

Maintenance

Clean the solar module with a damp towel to insure optimum performance of the Solar Post Lamp. Do not use any type of solvent for cleaning and be careful not to put too much pressure on the module while cleaning.

Limited Warranty Proof of Purchase is Required (Receipt) Nature Power warrants our products to the original purchaser that this product is free from defects in materials and workmanship for the period of one year from date of purchase.

Please contact Nature Power Products to acquire more information or technical support:

1-800-588-0590

info@naturepowerproducts.com

www.naturepowerproducts.com